


Specification Sheet

UNI 125 Anchor Seal

The **UNI125 Anchor seal** is a sophisticated security seal constructed in polycarbonate (PC) body, polyacetal (POM) and steel wire. It is supplied in one piece ready to use with the **anchor pre-assembled** into the body to prevent tampering before use. **Duplicate numbering is laser-printed** onto body and insert for an enhanced security.

The UNI125 can be assembled with **sealing wire pre-attached**, allowing simple application to all kinds of utility meters. The UNI125 is available in **three versions**, with **long** or **extra-long** versions available with white panel for barcode printing.

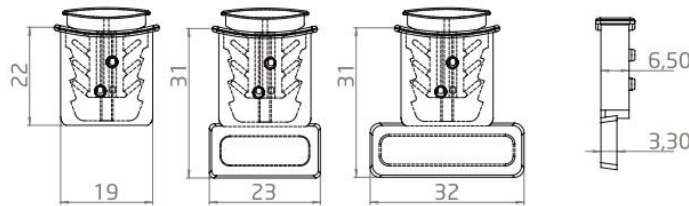

Available in three sizes:

Standard: 22x19mm

Long (L): 31x23mm

Extra-Long (XL): 31x32mm

Applications

Utility meters (gas, electrical and water meters), petroleum, taxi, telecommunication & postal sectors.

Material

Polycarbonate (PC) body, polyacetal (POM) insert and steel sealing wire

Size Guide

22x19mm body / 31x23mm (L) / 31x32mm (XL).
Variable length sealing wire.

Technical specs

Nylon operating temperature: -40°C to +120°C

Tensile strength: 30KgF

Available Colours

Clear or white PC body, with choice of insert colour: red, blue, green, yellow and orange as standard – other colours on request.

Packaging

	UNI125 with pre-attached 20cm wire
Quantity	1,000pcs
Carton Dimensions	24x30x34cm
Box Weight	4.4kg
Pallet Info	90x120x220cm 00,000pcs

Customisation Options

Company marking, duplicate 8-digit sequential numbering on body and insert.

Long and XL versions available with white panel for barcode marking.